


Characteristics

Nominal voltage	12V (6 cell per unit)	
Nominal power at 15 min. rate 1.67V/cell (25°C)	360W	
Capacity (25°C)	10 Hours rate/10.8V	95Ah
	5 Hours rate/10.8V	79Ah
Terminal type	T14	
Torque	5.1±0.6N.m	
Approx. internal resistance (25°C)	4.0 mΩ	
Dimensions	Length	306±2mm (12.05inch)
	Width	169±2mm (6.65inch)
	Height	211±2mm (8.31inch)
	Total height	215±2mm (8.46inch)
Design Life (stand-by)	JIS at 25°C	10 years
	Eurobat at 20°C	10-12 years
Weight	31.10kg (68.56lbs)±3%	
Nominal operating temperature	25±3°C (77°F±5)	
Operating temperature range	Discharge	-15°C~50°C (5°F~122°F)
	Charge	-10°C~50°C (14°F~122°F)
	Storage	-20°C~50°C (-4°F~122°F)
Float charging voltage at 25°C	13.5V~13.8V	
Cyclic charging voltage at 25°C	14.5V~15.0V	
Temperature compensation	Float charge	-18 (mV/°C/Block)
	Cycle charge	-30 (mV/°C/Block)
Max. charging current (A)	28A	
Max. discharge current for 5 seconds	800A	
Self discharge rate (25°C)	≤3%/month	
Battery container ABS UL94-HB	V-0 optional	

Overview

DESA BATTERY High Rate series batteries are specially de-signed for applications that require high power output. With their high-power density and low internal resis-tance, the HR series are the right choice for your most demanding applications.

Dimensions & Terminal Type (mm)

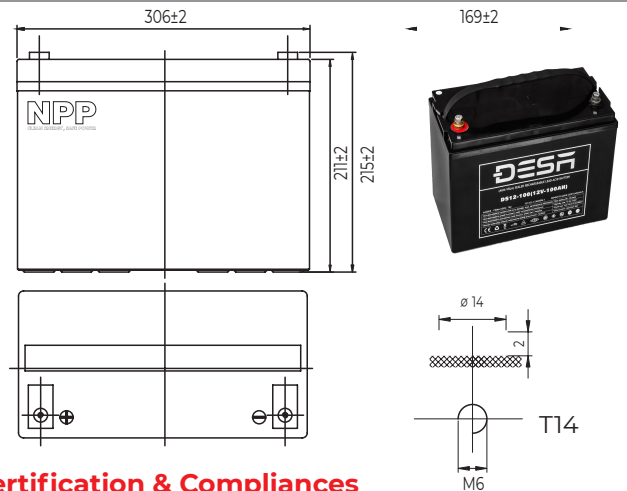

Certification & Compliances



Compliant to: EUROBAT, RoHS, WEEE's and Reach.
Manufactured according to IEC 60896-21 / 22

Construction

Component	Positive Plate	Negative plate	Container	Separator	Electrolyte	Safety valve	Terminal
Raw material	Lead dioxide	Lead	ABS (V-0 opt.)	AGM	Sulfuric Acid	Rubber	Copper

Constant current discharge characteristics at 25°C

(Ampere/cell)

F.V/Time	5min	10min	15min	20min	30min	45min	60min	2h	3h	4h	5h	6h
1.60V/cell	357.0	232.5	211.5	169.5	125.9	87.9	64.6	35.3	24.0	19.4	16.6	14.3
1.67V/cell	339.2	222.7	205.5	162.2	121.8	85.1	63.0	35.0	23.8	19.2	16.5	14.3
1.70V/cell	330.2	216.2	199.5	158.6	119.5	83.4	62.0	34.8	23.7	19.1	16.4	14.2
1.75V/cell	315.4	207.6	192.3	153.8	116.6	81.4	60.8	34.3	23.5	19.0	16.3	14.1
1.80V/cell	296.0	195.7	181.5	145.4	112.4	78.5	58.9	33.4	22.8	18.4	15.8	13.7

Constant power discharge characteristics at 25°C

(Watts/cell)

F.V/Time	5min	10min	15min	20min	30min	45min	60min	2h	3h	4h	5h	6h
1.60V/cell	575.4	440.3	376.0	320.6	238.9	173.5	124.6	69.0	47.3	38.0	32.9	28.4
1.67V/cell	547.6	419.6	361.3	307.7	230.3	167.4	121.4	68.3	46.8	37.7	32.6	28.2
1.70V/cell	520.8	408.7	353.9	301.8	226.5	163.8	119.3	67.9	46.6	37.6	32.5	28.1
1.75V/cell	506.4	391.3	341.7	291.2	221.6	160.2	117.1	66.9	46.3	37.3	32.3	27.9
1.80V/cell	483.4	369.6	322.9	275.8	212.9	154.2	113.9	65.2	45.0	36.2	31.3	27.1

The above characteristics represent average values and can be obtained within three charge and discharge cycles. The batteries must be fully charged before testing. The data in this document is subject to change without notice and become contractual only after written confirmation. Please contact NPP Power for the latest available version.